



«MAGNITO-KONTAKT» Ltd

51B, place H4, Novaya St., 390027 Ryazan, Russia, phone +7 915 622-20-57
E-mail: olya374@rambler.ru; 451694@bk.ru <http://www.m-kontakt.ru>

PINPOINT SECURITY MAGNETICALLY CONTACT DETECTOR IO 102-29 "ESTET-SAFE"



Description



Detectors are designed to block door and window openings, and blocking of other constructive elements of buildings and structures, opening or displacement with the results of the signal "Alarm" on the control panel, concentrator or Central surveillance console.

This is the smallest sensor on the metal.

Mounting holes are covered with a decorative cap.

Dimensions

Dimensions in mm

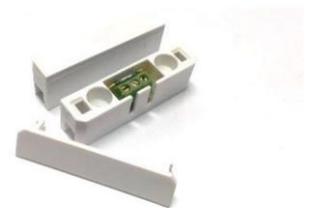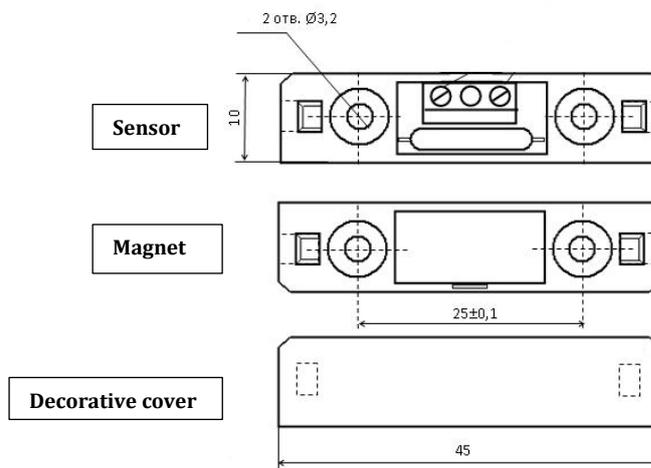

Electrical characteristics

Switching current	≤0,5A
Switching voltage	≤72V
Switching power max	10W,VA
Operating temperature	-50...+50°C
Humidity	98%
Contact resistance	0,5 Ω
Sensor/magnet weight, kg, max	0.01/0.015